



# CONFORMANCE TEST REPORT FOR EN 301489-1/-6

**Report No.: 60.860.9.029.01E**

Client: Shenzhen Guo Wei Electronics Co., Ltd.  
Product: DECT Phone  
Model: DECT70-B95 (PP)  
Manufacturer/supplier: Shenzhen Guo Wei Electronics Co., Ltd.

Date test item received: 2009/04/17  
Date test campaign completed: 2009/04/24  
Date of issue: 2009/04/30  
Test results: **COMPLIED**

**The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.**

*Total number of pages of this test report: 16 pages*

Approved by

Jeff Pong

**TÜV SÜD Hong Kong Ltd.**  
3/F, West Wing, Lakeside 2, 10 Science Park West Avenue, Science Park, Shatin, Hong Kong

## **CONTENTS**

●	EMC TEST REPORT .....	1
●	CONTENTS.....	2
1	TEST REPORT CERTIFICATION .....	3
2	GENERAL INFORMATIONS .....	4
2.1	Description of EUT:.....	4
2.2	Related Informations of EUT: .....	4
2.3	Modification Record:.....	4
3	SUMMARY OF TEST RESULTS .....	5
3.1	Emissions: .....	5
3.1.1	Radiated Emissions .....	5
3.2	Immunity:.....	5
3.2.1	Immunity Criteria: .....	5
3.2.2	Electrostatic Discharge:.....	6
3.2.3	Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz): .....	6
4	TEST DATA & RELATED INFORMATIONS .....	7
4.1	Emissions: .....	7
4.1.1	Radiated Emissions Test:.....	7
4.1.1.1	Radiated Emissions Test Data: .....	7
4.1.1.2	Radiated Emissions Test Setup Photos:.....	9
4.2	Immunity:.....	10
4.2.1	Electrostatic Discharge:.....	10
4.2.1.1	Electrostatic Discharge Test Data:.....	10
4.2.1.2	Electrostatic Discharge Test Setup Photos:.....	11
4.2.2	Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz): .....	12
4.2.2.1	Radio Frequency Electromagnetic Field Test Data: .....	12
4.2.2.2	Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz) Test Setup Photos:.....	13

# 1 TEST REPORT CERTIFICATION

Client : Shenzhen Guo Wei Electronics Co., Ltd.  
Address : No. 68, Guowei Road, Liantang Industrial District, Shenzhen, P.R.C  
Manufacturer : Shenzhen Guo Wei Electronics Co., Ltd.  
EUT : DECT Phone  
Model No. : DECT70-B95 (PP)  
Test Specifications : Emissions  
EN 55022:2006(Class B)  
Immunity  
EN 61000-4-2:1995/A2:2001  
EN 61000-4-3:2006/A1:2008  
Regulations Applied : EN 301489-1:V1.8.1  
EN 301489-6:V1.2.1

Test Location:

T01

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to believe the sellers from their legal and/or contractual obligations.

## 2 GENERAL INFORMATIONS

### 2.1 Description of EUT:

The Test Candidate is a portable part with integrated antennas of a cordless telephone system for 3.1 kHz voice-communications on DECT Feature Phone-standard. For the integrated antennas a diversity-switch is included to the equipment. This portable part (PP) is used in combination with a fixed part (FP) for connections to the analogue public switched telephone network.

### 2.2 Related Informations of EUT:

Power Supply : 2.4 Vdc

---

Power Line : ☐ Nonshielded ☐ Shielded ☒ None , length: \_\_\_\_\_ m

Ears Line : ☐ Nonshielded ☐ Shielded ☒ None , length: \_\_\_\_\_ m

Control Line : ☐ Nonshielded ☐ Shielded ☒ None , length: \_\_\_\_\_ m

TEL. Line : ☐ Nonshielded ☐ Shielded ☒ None , length: \_\_\_\_\_ m

Signal Line : ☐ Nonshielded ☐ Shielded ☒ None , length: \_\_\_\_\_ m

\* For more detailed features, please refer to *User's Manual*.

### 2.3 Modification Record:

No modifications were required. (That mean the EUT has complied with the requirement as tested.)

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Emissions:

##### 3.1.1 Radiated Emissions

■-PASS

Peak EMI value to the limit: -2.4 dB at 37.776 MHz

#### 3.2 Immunity:

##### 3.2.1 Immunity Criteria:

The results of all of the immunity tests performed on the EUT were evaluated according to the following criteria, and according to the manufacturer's specifications for the EUT:

##### **Performance criterion for Continuous Phenomena applied to DECT Phone Transceivers (CT):**

The BER of the signal as measured shall not exceed  $1 \times 10^{-3}$  during the test sequence. Additionally for equipment containing analogue speech circuits the speech output signal level shall be at least 35dB less than the previously recorded reference level. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data and the communications link shall have been maintained during and after tests. Where the EUT is capable of transmission, tests shall be performed to ensure that unintentional transmission does not occur.

##### **Performance criterion for Transient phenomena applied to DECT Phone Transceivers (TT):**

At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communications link. At the conclusion of the total test comprising the series of individual exposures the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communications link shall have been maintained. Where the EUT is capable of transmission, tests shall be performed to ensure that unintentional transmission does not occur.

##### **Performance criterion for Continuous phenomena applied to DECT Phone Receive-only equipment (CR):**

The primary functions shall be verified during each individual exposure in the test sequence. Additionally for equipment containing analogue speech circuits the speech output signal level shall be at least 35 dB less than the previously recorded reference level. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communications link shall have been maintained. This shall be verified by checking the primary functions.

##### **Performance criterion for Transient phenomena applied to DECT Phone Receive-only equipment (TR):**

At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communications link. At the conclusion of the total test comprising the series of individual exposures the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communications link shall have been maintained. This shall be verified by checking the primary functions.

**3.2.2 Electrostatic Discharge:****■-PASS**

For transceivers the general performance criteria TT shall apply. For stand alone receivers the general performance criteria TR shall apply. For ancillary equipment the pass/fail criteria supplied by the manufacturer shall apply, unless the ancillary equipment is tested in connection with receivers or transceivers in which case the corresponding performance criteria above shall apply.

**3.2.3 Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz):****■-PASS**

For transceivers the general performance criteria CT shall apply. For stand alone receivers the general performance criteria CR shall apply. For ancillary equipment the pass/fail criteria supplied by the manufacturer shall apply, unless the ancillary equipment is tested in connection with receivers or transceivers in which case the corresponding performance criteria above shall apply.

## 4 TEST DATA & RELATED INFORMATION

### 4.1 Emissions:

#### 4.1.1 Radiated Emissions Test:

##### 4.1.1.1 Radiated Emissions Test Data:

A. Operating Conditions of the EUT: Talking Mode

Test Date: Apr. 24, 2009

Test Specification	EN 55022:2006 (Class B)		
Test Equipment		Calibration Date	Recommended Recal. Date
EMI Test Receiver\R&S\ESCS30		Nov. 03, 2008	Nov. 02, 2009
Ant.- LogBiconi\EMCO\3142		May 13, 2008	May 12, 2009
Spectrum\R&S\FSU		Nov. 25, 2008	Nov. 24, 2009
Horn Ant.\EMCO\3115		Jun. 13, 2008	Jun. 12, 2009
Preamp\HP\8449B		Oct. 09, 2008	Oct. 08, 2009
Climatic Condition	Ambient Temperature: <u>20°</u> C		

Measurement Distance: 10 m ( 80MHz~1GHz )

Emission Frequency (MHz)	Meter Reading (dBuV)		CORR'd Factor (dB/m)	Results (dBuV/m)		Limit (dBuV/m)	Margins (dB)
	HOR.	VERT.		HOR.	VERT.		
30.000	7.3	3.8	18.6	25.9	22.3	30	-4.1
37.776	***	13.9	13.7	***	27.6	30	-2.4
39.719	12.6	***	13.7	26.3	***	30	-3.7
57.214	***	14.1	9.1	***	23.2	30	-6.8
78.597	***	7.2	8.9	***	16.1	30	-13.9
105.812	***	2.8	10.1	***	12.9	30	-17.1
119.419	***	2.8	9.4	***	12.2	30	-17.8
131.082	2.6	***	9.5	12.1	***	30	-17.9
169.960	***	2.7	11.6	***	14.3	30	-15.7
414.890	6.7	***	21.4	28.1	***	37	-8.9
706.473	5.2	***	28.2	33.4	***	37	-3.6
720.080	4.2	***	28.9	33.1	***	37	-3.9
760.902	4.7	***	29.3	34.0	***	37	-3.0

Measurement Distance: 3m (1GHz~6GHz)

Emission Frequency (MHz)	Meter Reading@3m (dBuV)				CORR'd Factor (dB/m)	Max Results (dBuV/m)		Limit@3m (dBuV/m)		Margins (dB)
	HOR.		VERT.			HOR.	VERT.	PK	AV	
	PK	AV	PK	AV		PK	AV	PK	AV	
5679.000	52.2	33.1	54.9	32.7	-0.4	54.5	32.7	74	54	-19.5

- Notes: 1) Place of Measurement: Measuring site of the ETC (3F)  
 2) Measurement Distance: 10 m ( 80MHz~1GHz ), 3m (1GHz~6GHz)  
 3) Height of table on which the EUT was placed: 0.8 m  
 4) Height of Receiving Antenna: 1 - 4 m  
 5) Example Calculation: result for 30.000 MHz  $7.3 + (18.6) = 25.9 \text{ dB } \mu\text{V/m}$   
 6) ① If the data table appeared symbol of "\*\*\*\*" means the value was too low to be measured.  
     ② If the data table appeared symbol of "----" means the Q.P. value is under the limit for AVG. so, the AVG. value doesn't need to be measured.  
     ③ If the data table appeared symbol of "#" means the noise was low, so record the peak  
 7) The estimated measurement uncertainty of the result measurement is

$\pm 5.06$ , 95%, K=2, (30 MHz-1000 MHz)



#### 4.1.1.2 Radiated Emissions Test Setup Photos:



## 4.2 Immunity:

### 4.2.1 Electrostatic Discharge:

#### 4.2.1.1 Electrostatic Discharge Test Data:

##### A. Operating Conditions of the EUT: Talking Mode

Test Date: Apr. 24, 2009

Test Specification	EN 61000-4-2: 1995/A2:2001		
Test Equipment		Calibration Date	Recommended Recal. Date
ESD Simulator\EMC PARTNER\ESD3000		Jul. 04, 2008	Jul. 03, 2009
Climatic Condition	Ambient Temperature: <u>20</u> °C                      Relative Humidity: <u>52</u> % RH  Atmospheric Pressure: <u>988</u> mbar		
Power Supply System	DC Power: <u>2.4</u> Vdc		
Test Set-up	Table-top Equipment		

Test Points	Contact Discharge (kV): Criterion					Air Discharge (kV): Criterion					Test times and voltage at each condition	
1.EUT-VCP	■2: <u>A</u>	■4: <u>A</u>	□ 6: _	□ 8: _	□ _: _	□ 2: _	□ 4: _	□ 8: _	□ 15: _	□ _: _	■10..neg	■10..pos
2.EUT-HCP	■2: <u>A</u>	■4: <u>A</u>	□ 6: _	□ 8: _	□ _: _	□ 2: _	□ 4: _	□ 8: _	□ 15: _	□ _: _	■10..neg	■10..pos
3.EUT-charge point	■2: <u>A</u>	■4: <u>A</u>	□ 6: _	□ 8: _	□ _: _	□ 2: _	□ 4: _	□ 8: _	□ 15: _	□ _: _	■10..neg	■10..pos
4.EUT-Top Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos
5.EUT-Bottom Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos
6.EUT-Front Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos
7.EUT-Rear Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos
8.EUT-Right Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos
9.EUT-Left Side	□ 2: _	□ 4: _	□ 6: _	□ 8: _	□ _: _	■2: <u>A</u>	■4: <u>A</u>	■8: <u>A</u>	□ 15: _	□ _: _	■10..neg	■10..pos

Result:	■ Complied      □ Does not comply		
Criterion Required:	<u>B</u>	Criterion Met:	<u>A</u>

Note: “A” means the EUT operates with ■ no loss of functions.

■ no unintentional responses during and after test.

“--” means the test is not applicable.

#### 4.2.1.2 Electrostatic Discharge Test Setup Photos:



**4.2.2 Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz):****4.2.2.1 Radio Frequency Electromagnetic Field Test Data:****A. Operating Conditions of the EUT: Talking Mode**

Test Date: Apr. 22, 2009

Test Specification	EN 61000-4-3:2006/A1:2008	
Test Equipment	Calibration Date	Recommended Recal. Date
Microphone\B&K\4134	Nov. 20, 2008	Nov. 19, 2009
Conditioning Amplifier\B&K\type 2690	Nov. 20, 2008	Nov. 19, 2009
Audio Analyzer\R&S\UPV	Jan 30, 2009	Jan 29, 2010
IMS Integrated Measurement System\R&S\IMS	Sep. 29, 2008	Sep. 28, 2009
RF Power Amplifier\AR\50S1G4AM1	May 28, 2008	May 27, 2009
RF Power Amplifier \AR\250W1000AM1	May 28, 2008	May 27, 2009
DECT Tester\R&S\CTS60	Mar. 03, 2009	Mar. 02, 2010
Climatic Condition	Ambient Temperature: <u>19</u> °C      Relative Humidity: <u>63</u> % RH	
Power Supply System	DC Power: <u>2.4</u> Vdc	
Test Set-up	Table-top Equipment	

Frequency Range : <u>80</u> MHz ~ <u>1000</u> MHz <u>1400</u> MHz ~ <u>2700</u> MHz	Field Strength: <u>3</u> V/m	Modulation (AM 1kHz 80%)
Sweep Rate: $\leq 1.5 \times 10^{-3}$ decades/s	Step Size: $\leq 1$ % of preceding frequency value	Dwell Time: <u>2.9</u> s
Frequency Range (MHz)	Polarization of Device	Test Result
80~1000	Vertical	A
80~1000	Horizontal	A
1400~2700	Vertical	A
1400~2700	Horizontal	A


Note: “A ” means the EUT operates with

- BER less or equal than  $1 \times 10^{-3}$  during the test sequence.
- the speech output signal level at least 35dB less than the previously recorded reference level.
- no loss of user control functions or stored data and maintained communication link during and after the tests.
- no unintentional transmission.

Remarks: Testing has been conducted at 3-meter anechoic chamber.




**4.2.2.2 Radio Frequency Electromagnetic Field (80~1000MHz and 1400~2700MHz)  
Test Setup Photos:**

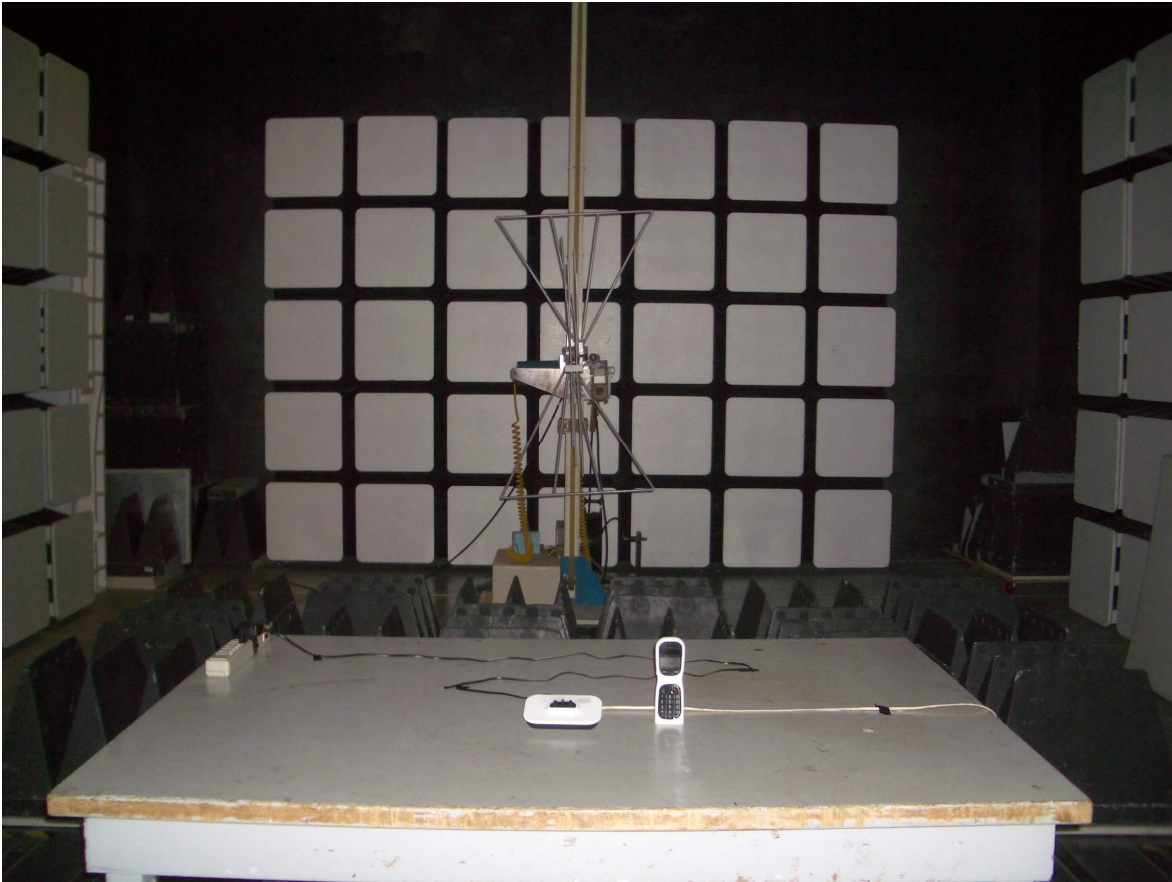

Common Information

Test Description:	DECT70-B95_PP+FP
Operating Conditions:	DL
Operator Name:	Mandey
Comment:	H


ABT DL

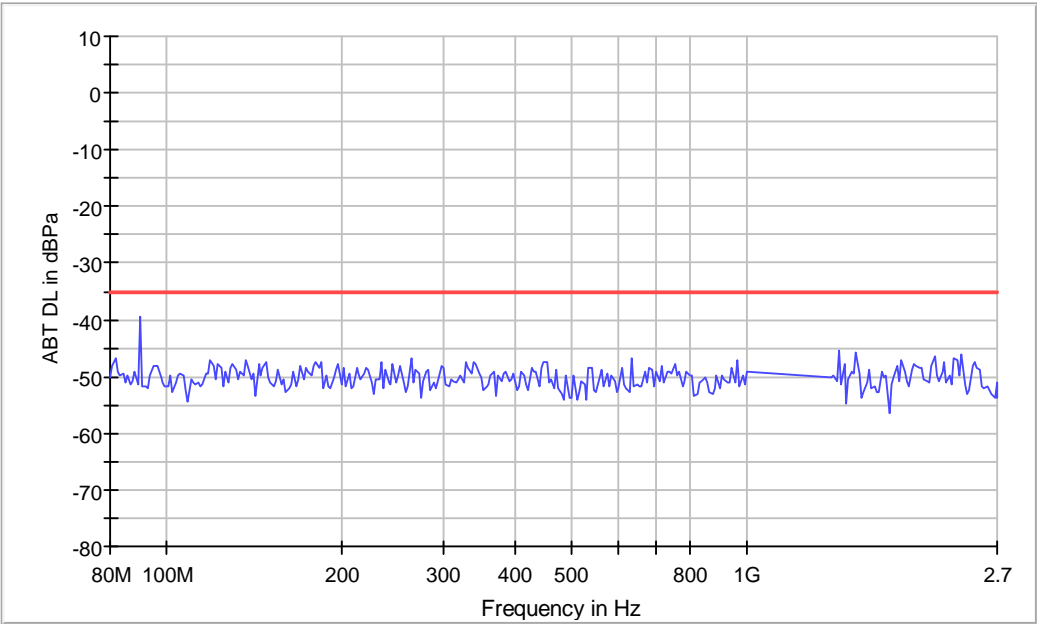

## Common Information

Test Description:	DECT70-B95_PP+FP
Operating Conditions:	UL
Operator Name:	Mandey
Comment:	H


ABT UL

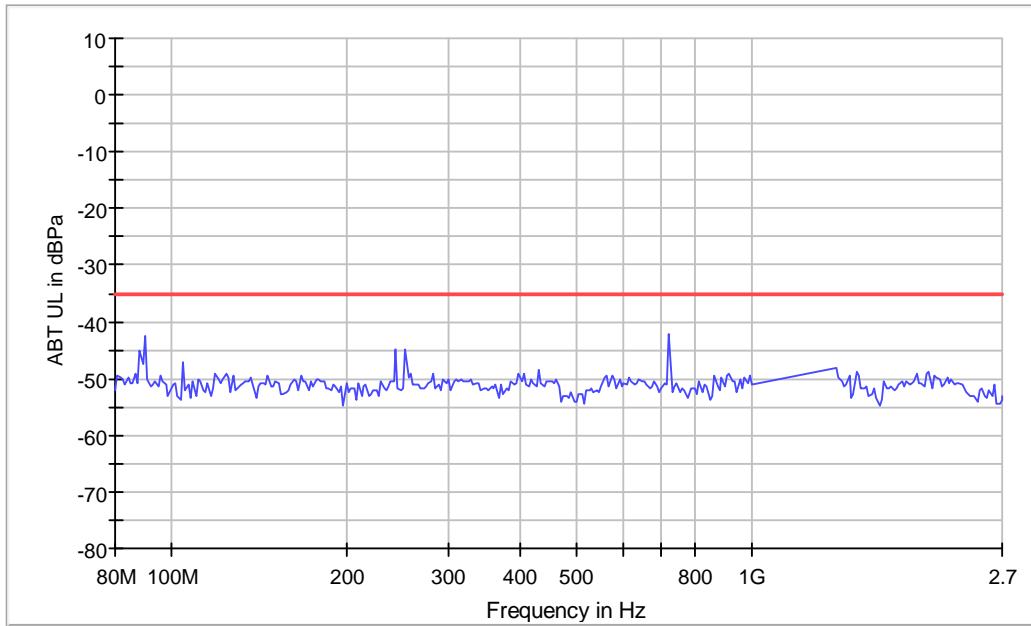

## Common Information

Test Description:	DECT70-B95_PP+FP
Operating Conditions:	DL
Operator Name:	Mandey
Comment:	V

ABT DL

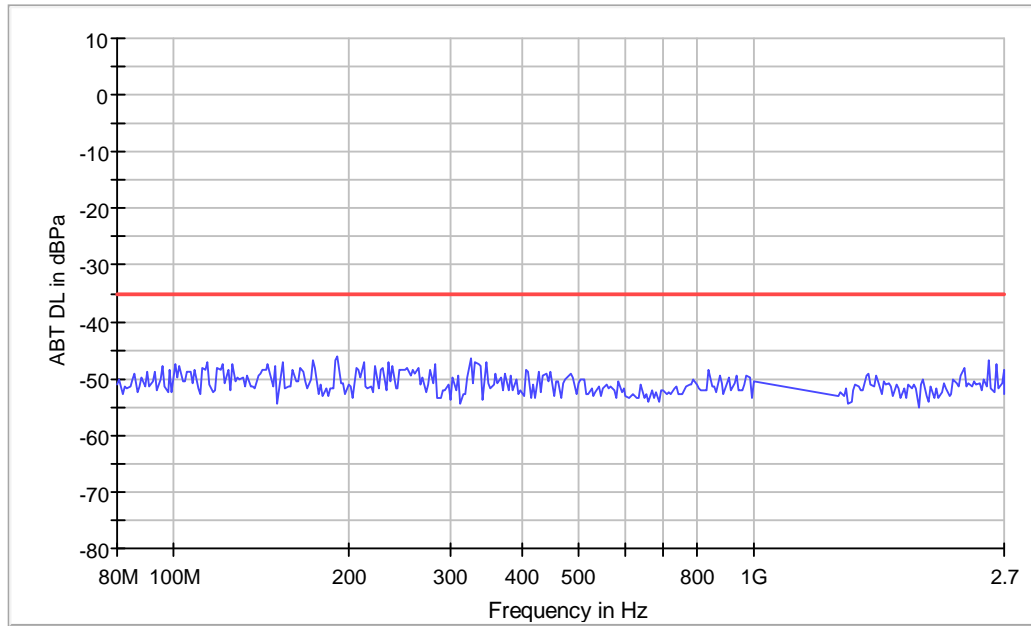



## Common Information

Test Description:	DECT70-B95_PP+FP
Operating Conditions:	UL
Operator Name:	Mandey
Comment:	V

ABT UL

